



BANBURY DOWNLIGHTS





INSULATION BRACKET
(SOLD SEPARATELY)



SUCTION CUP FOR
LAMP REMOVAL



BANBURY TRIMLESS TILT DOWNLIGHT

FIRE RATED DOWNLIGHT



GU10 SOCKET

IP65



ACOUSTIC RATED



MOISTURE RATED



90 FIRE RATED

CLASS I




AC220-240V 50/60HZ

FEATURES & BENEFITS

- Fixed Downlight
- GU10 Socket – Max 10W
- GU10 bulb – not included
- Low glare
- Open back design with tempered glass bezel
- IP65 Rating
- Fire Rated upto 90 minutes
- Acoustic, Moisture, & Joist Rated
- Ceiling mounting
- Loop in and out quick connector
- Ideal for solid Joist & I-Joist ceilings
- Twin spring loaded brackets
- Die-cast aluminium
- Matt white finish
- 3 year warranty

DIMENSIONS



SPECIFICATIONS

Product Code	Finish	Socket	Cutout	Dimension
UNO-BANBURY-TRIM-TILT-WHT	Matt White	GU10	75mm	L106mm x W87mm x H50mm
UNO-BANBURY-TRIM-TILT-BLK	Black	GU10	75mm	L106mm x W87mm x H50mm

FEATURES



TILT TRIMLESS



TRIMLESS



UNIFORM DESIGN
1 INSERT 3 BEZEL STYLES




MINIMAL

LOW PROFILE - IDEAL FOR
SHALLOW CEILINGS



OPEN BACK TRIMLESS / TRIMLESS TILT
OPTIONS AVAILABLE

FEATURES

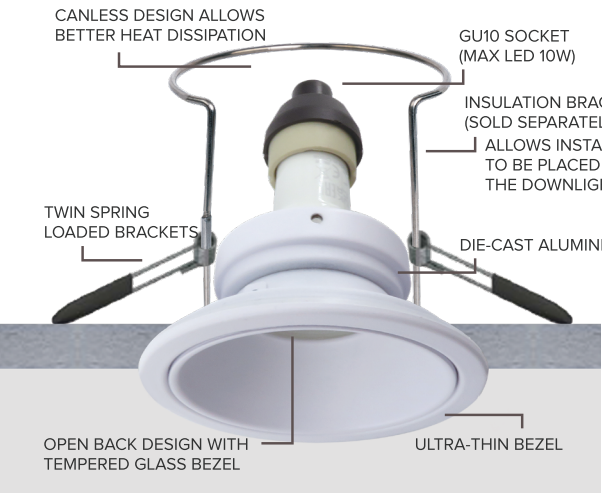

IP65

FIRE RATED
90

ACOUSTIC
RATED


MOISTURE
RATED



**INSULATION BRACKET
(SOLD SEPARATELY)
BRACKET IS REQUIRED
WHEN LOFT INSTALLATION
IS PLACED OVER THE
DOWNLIGHT**



COMPATIBLE WITH I-JOISTS & SOLID JOISTS



**EASY TO INSTALL
LOOP-IN / LOOP-OUT
TERMINAL BLOCK**



SUPPLIED WITH A GU10 HOLDER