

# BANBURY DOWNLIGHTS





INSULATION BRACKET  
(SOLD SEPARATELY)



SUCTION CUP FOR  
LAMP REMOVAL



**NEW**

# MINIMAL FIXED DOWNLIGHT

## FIRE RATED FIXED DOWNLIGHT



GU10 SOCKET

IP65



ACOUSTIC RATED



MOISTURE RATED



90 FIRE RATED

CLASS I




AC220-240V 50/60HZ

### FEATURES & BENEFITS

- Fixed Downlight
- GU10 Socket – Max 10W
- GU10 bulb – not included
- Low glare
- Open back design with tempered glass bezel
- IP65 Rating
- Fire Rated upto 90 minutes
- Acoustic, Moisture, & Joist Rated
- Ceiling mounting
- Loop in and out quick connector
- Ideal for solid Joist & I-Joist ceilings
- Twin spring loaded brackets
- Die-cast aluminium
- Matt white finish
- 3 year warranty

### DIMENSIONS



### SPECIFICATIONS

Product Code	Finish	Socket	Cutout	Dimension
BANBURY-FIX-WHT	Matt White	GU10	80mm	87 x 41 mm



INSULATION BRACKET  
(SOLD SEPARATELY)



SUCTION CUP FOR  
LAMP REMOVAL

**NEW**

# BANBURY TRIMLESS DOWNLIGHT

## FIRE RATED DOWNLIGHT



GU10 SOCKET

IP65



ACOUSTIC RATED



MOISTURE RATED



90 FIRE RATED

CLASS I




AC220-240V 50/60HZ

### FEATURES & BENEFITS

- Fixed Downlight
- GU10 Socket – Max 10W
- GU10 bulb – not included
- Low glare
- Open back design with tempered glass bezel
- IP65 Rating
- Fire Rated upto 90 minutes
- Acoustic, Moisture, & Joist Rated
- Ceiling mounting
- Loop in and out quick connector
- Ideal for solid Joist & I-Joist ceilings
- Twin spring loaded brackets
- Die-cast aluminium
- Matt white finish
- 3 year warranty

### DIMENSIONS



### SPECIFICATIONS

Product Code	Finish	Socket	Cutout	Dimension
BANBURY-TRIM-WHT	Matt White	GU10	75mm	L106 x W87 x H39
BANBURY-TRIM-BLK	Black	GU10	75mm	L106 x W87 x H39



INSULATION BRACKET  
(SOLD SEPARATELY)



SUCTION CUP FOR  
LAMP REMOVAL

**NEW**

# BANBURY TRIMLESS TILT DOWNLIGHT

## FIRE RATED DOWNLIGHT



GU10 SOCKET

IP65



ACOUSTIC RATED



MOISTURE RATED



90 FIRE RATED

CLASS I




AC220-240V 50/60HZ

### FEATURES & BENEFITS

- Fixed Downlight
- GU10 Socket – Max 10W
- GU10 bulb – not included
- Low glare
- Open back design with tempered glass bezel
- IP65 Rating
- Fire Rated upto 90 minutes
- Acoustic, Moisture, & Joist Rated
- Ceiling mounting
- Loop in and out quick connector
- Ideal for solid Joist & I-Joist ceilings
- Twin spring loaded brackets
- Die-cast aluminium
- Matt white finish
- 3 year warranty

### DIMENSIONS



### SPECIFICATIONS

Product Code	Finish	Socket	Cutout	Dimension
BANBURY-TRIM-TILT-WHT	Matt White	GU10	75mm	L106mm x W87mm x H50mm
BANBURY-TRIM-TILT-BLK	Black	GU10	75mm	L106mm x W87mm x H50mm

# FEATURES



TILT TRIMLESS



TRIMLESS



UNIFORM DESIGN  
1 INSERT 3 BEZEL STYLES



MINIMAL


LOW PROFILE - IDEAL FOR  
SHALLOW CEILINGS




OPEN BACK TRIMLESS / TRIMLESS TILT  
OPTIONS AVAILABLE




# FEATURES

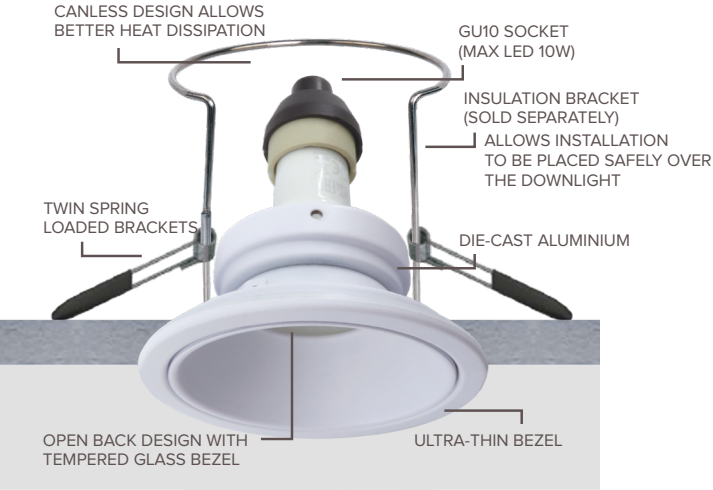


**INSULATION BRACKET (SOLD SEPARATELY) BRACKET IS REQUIRED WHEN LOFT INSTALLATION IS PLACED OVER THE DOWNLIGHT**

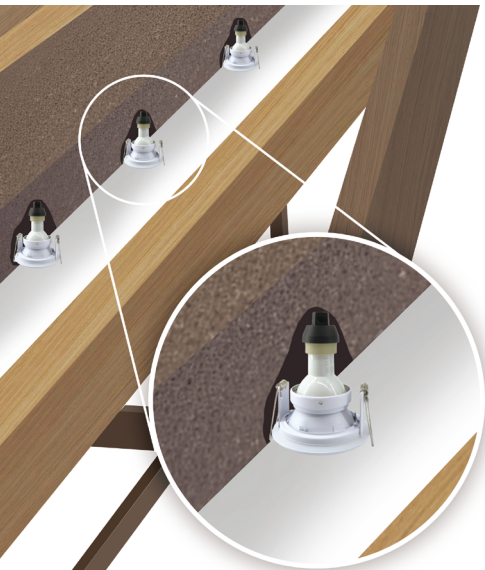

**COMPATIBLE WITH I-JOISTS & SOLID JOISTS**



**EASY TO INSTALL LOOP-IN / LOOP-OUT TERMINAL BLOCK**



**SUPPLIED WITH A GU10 HOLDER**