


TRIMLESS 12 PROFILE - APPLICATION DIAGRAM


SEAMLESS PLASTER-IN CEILING INSTALLATION

Designed to be plastered into drywall ceilings for a seamless, trimless finish. The plastering wings are covered with joint compound for a perfect integration with the ceiling.

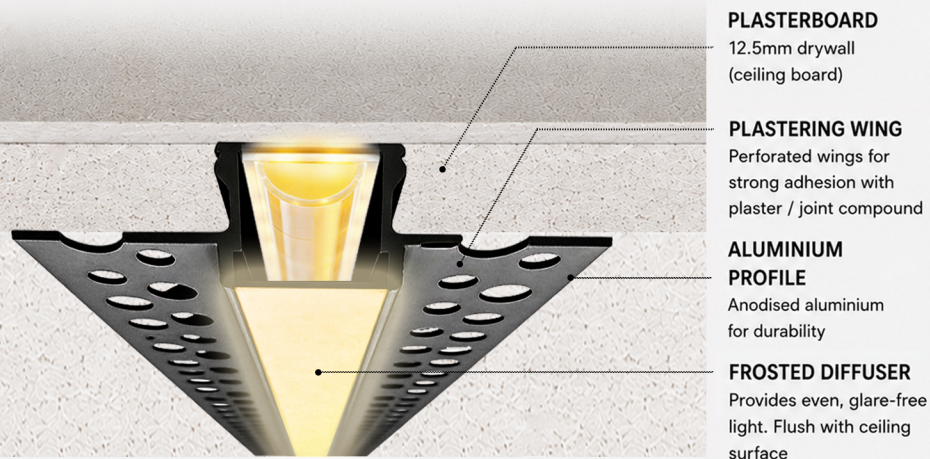

PROFILE SPECIFICATIONS

DIMENSIONS (MM)

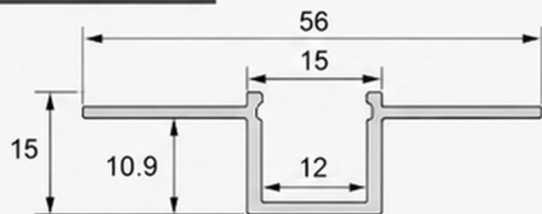

- Overall width: 56mm
- Overall depth: 15mm
- Internal depth: 10.9mm
- Channel opening: 20mm
- Suitable for LED strips up to 12mm width

PROFILE SPECIFICATIONS

- Overall width: 56mm
- Overall depth: 15mm
- Internal depth: 10.9mm
- Suitable for LED strips up to 12mm width
- Raw Material: Aluminium Profile +PC PMMA Diffuser
- Profile Length: 2m
- Diffuser Colour: Frosted
- Size: 43*20mm
- PCB: 26.4mm



SCREWS INCLUDED

INSTALLATION STEPS

1 FIX PROFILE TO PLASTERBOARD



Fix the profile to the plasterboard using the included screws. Ensure the profile is secure and level.

2 INSERT FOAM FILLER



Insert the square foam filler to protect the channel and diffuser area during plastering.

3 APPLY PLASTER / JOINT COMPOUND



Apply joint compound / plaster over the perforated wings and smooth it flush with the ceiling surface. Allow to dry and sand if necessary.

4 REMOVE FOAM FILLER



Once the plaster is completely dry, remove the foam filler.

5 INSTALL LED STRIP



Install the LED strip inside the profile. Up to 12mm wide LED strip recommended.

6 SNAP IN DIFFUSER



Snap in the frosted diffuser until it is flush with the ceiling for a seamless, trimless light line.

FINISHED RESULT



A clean, seamless light line fully integrated into the ceiling.