



LOLA



Supplied with
In-Ground Sleeve



This fitting requires a Non Dimmable or
Dimmable 24V 'Constant Voltage' Driver
(Sold Separately)



LOLA

IP67 IN GROUND

2.5W/5W

50K
LIFESPAN (HRS)



BEAM ANGLE

2 YEAR WARRANTY

OSRAM CHIP

CE &
ROHS

CRI
90



DC 24V

IP67


FEATURES & BENEFITS

- Integrated Recessed Downlight
- 240 Lumens
- LED Chip - Osram
- Beam Angle 30°
- IP Rating - IP67
- Anti-Glare
- Faceted Lens
- Waterproof gland
- 2 waterproof gaskets
- Flush toughened glass
- Made from 316 Stainless Steel for maximum durability
- Stainless Steel, Matt White, Eyelid & Up/Down Bezels available
- Available in 3000K & 4000K
- 24V Constant Voltage Wired in parallel
- 2 Metres rubberised cable
- Ideal walk over light when used mounting sleeve
- Suitable as a walkover light
- 2 year warranty

DIMENSIONS




2.5W LOLA



5W LOLA

SPECIFICATIONS

Product Code	Description	Power	Colour	Lumens	Cutout	Dimension
LOLA-3K	MATT WHITE	2.5W/5W	3000k	240lm	32mm	36 × 30
LOLA-4K	MATT WHITE	2.5W	4000K	240lm	32mm	36 × 30
LOLA-BZL-WHT	LOLA Matt White Finish Bezel Only					
LOLA-BZL-BLK	LOLA Black White Finish Bezel Only					
LOLA-EYE-BZL	LOLA Eyelid Brushed Nickel Bezel Only					
LOLA-UPD-BZL	LOLA Up Down Brushed Nickel Bezel Only					
LOLA-MOON	LOLA Half Moon Glass Len					



Faceted Low Glare Lens



Ultra Thin Bezel



2 Metres Rubberised Cable




Waterproof Gland




In Ground Sleeve




2 Waterproof Gaskets




STAINLESS STEEL
PRODUCT CODE:
LOLA-3K/4K




HALF MOON LENS
PRODUCT CODE:
LEN-MOON




EYELID BEZEL
PRODUCT CODE:
LOLA-EYE-BZL




UP/DOWN BEZEL
PRODUCT CODE:
LOLA-UPD-BZL




MATT BLACK BEZEL
PRODUCT CODE:
LOLA-BLK-BZL



MATT WHITE BEZEL
PRODUCT CODE:
LOLA-WHT-BZL





BLACK EYELID BEZEL
PRODUCT CODE:
LOLA-EYEBLK-BZL



BLACK UP/DOWN BEZEL
PRODUCT CODE:
LOLA-UPDBLK-BZL

Please be aware only 24V constant voltage LED drivers can be used with this fitting. All fittings must be wired in parallel.

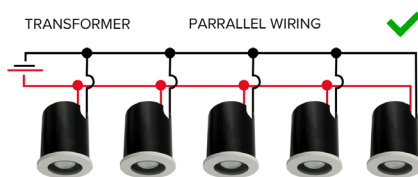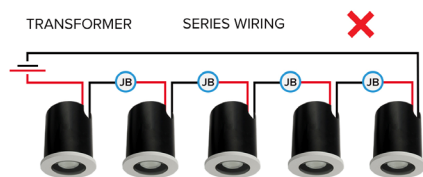

Antique Brass
UNO-LOLA-BZL-AB



Black
UNO-LOLA-BZL-BLK



Bronze
UNO-LOLA-BZL-BR



Copper
UNO-LOLA-BZL-PC




Gold
UNO-LOLA-BZL-BB




White
UNO-LOLA-BZL-WHT



2.5W LOLA

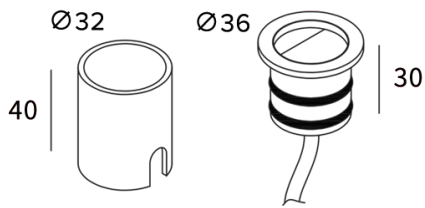

5W LOLA

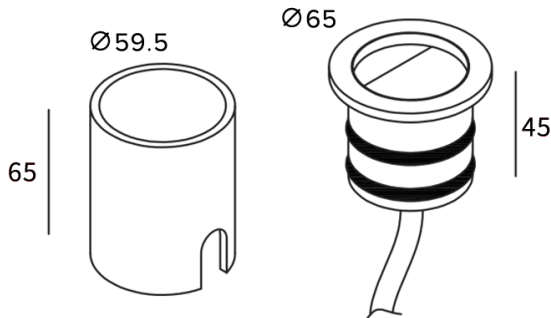

We recommend the following maximum amount of fittings to be used per driver.

Non Dimmable Driver Table - 2.5W LOLA

15W DRIVER	30W DRIVER	60W DRIVER	100W DRIVER
Max 4 fittings	Max 9 fittings	Max 19 fittings	Max 32 fittings

Non Dimmable Driver Table - 5W LOLA

15W DRIVER	30W DRIVER	60W DRIVER	100W DRIVER
Max 2 fittings	Max 4 fittings	Max 9 fittings	Max 16 fittings

Dimmable Driver Table - 2.5W LOLA

20W DRIVER	60W DRIVER	100W DRIVER
Max 6 fittings	Max 24 fittings	Max 32 fittings

Dimmable Driver Table - 5W LOLA

20W DRIVER	60W DRIVER	100W DRIVER
Max 3 fittings	Max 9 fittings	Max 16 fittings